

## 2 SSH 11

### Acoustic Hood for Explosive Areas




#### Main features

- Acoustic hood made of powder-coated sheet steel
- Suitable for use with INDUSTRONIC intercom stations
- Suitable for use in Ex zone 1, 2 and 22
- Flame-retardant and self-extinguishing
- Up to 30 dB noise reduction

The 2 SSH 11 acoustic hoods from INDUSTRONIC are used for sound reduction in extremely noisy environments. They ensure a high level of noise insulation and thus allow a clear and understandable communication. The acoustic hoods have a flame-retardant and a self-extinguishing insulation according to UL94-HF1, ISO 3582-SE and are suitable for the use in Ex zones 1, 2 and 22.

#### Absorption 2 SSH 11

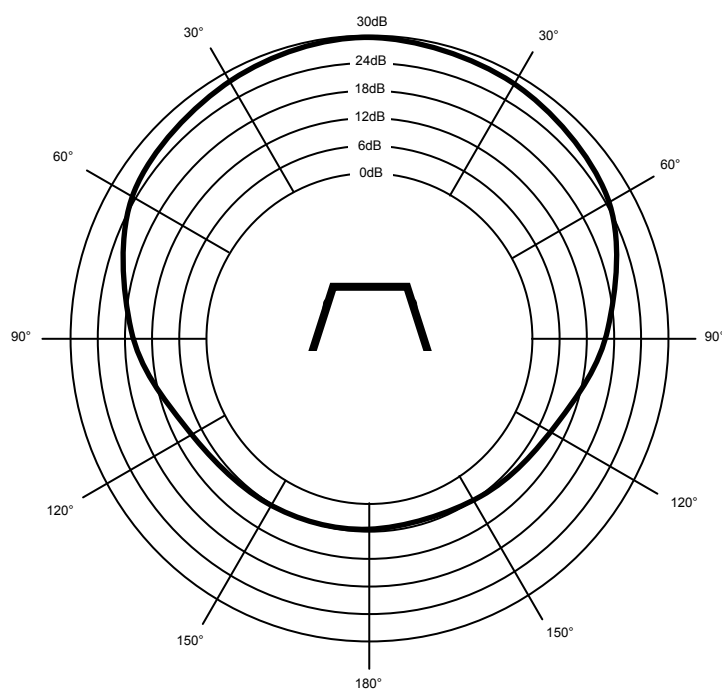

#### Technical data

• Material	Power-coated sheet steel
• Casing and inner lining	Stainless steel perforated plate and special foam rubber
• Insulation	Flame-retardant and a self-extinguishing insulation according to UL94-HF1, ISO 3582-SE
• Height x width x depth	900 mm x 650 mm x 535mm (35 1/2" x 25 1/2" x 21")
• Color	Red, Yellow, Orange
• Weight	34 kg (75 lb)
• Absorption	max. 30 dB
• Ambient temperature	-40 °C to +85 °C (-40 °F to 185 °F)

#### INDUSTRONIC®

Industrie-Electronic GmbH & Co. KG  
 Carl-Jacob-Kolb-Weg 1  
 97877 Wertheim / Germany

Tel.: +49 9342 871-0  
 Fax: +49 9342 871-565

info@industronic.de  
 www.industronic.com

Subject to technical modifications