



PMOD 4 XBC 001

BEACON CONTROL MODULE

MODULE TO CONNECT DIFFERENT TYPES OF FLASHING WARNING BEACONS

The INTRON-X is the modern, modular IP system platform for scalable intercom, PA/GA and PA solutions from INDUSTRONIC.

The XBC module is used to switch and monitor up to 4 flashing warning beacon circuits wired as line and/or loop.



- Control of up to 4 AC or DC flashing warning beacon circuits
- Flashing warning beacons can be wired as line or loop
 - Xenon, LED, etc.
 - 115 / 230 V AC
 - 24 / 48 / 60 V DC
- Continuous automatic line monitoring of the flashing warning beacons for cable break, short circuit and ground leakage (option)
- 2 Ethernet interfaces for redundant network connection
- Power supply of the internal electronics via PoE (with redundancy) or separate DC supply
- Integrated self-monitoring
- Configuration via INDUSTRONIC management tools

PLUG-IN DEVICE 4 XBC 001

Type number	344-030-100
-------------	-------------

MECHANICAL DATA

Mounting	1/3 19" width in an 1 RU INTRON-X 19" chassis of type 3 XRC 001
Width x height x depth	147 mm x 44 mm x 265 mm (5.79" x 1.73" x 10.43")
Weight	Approx. 1.1 kg (approx. 2.43 lbs)

POWER CONSUMPTION


Typical	3 W
Maximum	7 W

DC POWER SUPPLY (XD1)


Power supply	42 V DC to 72 V DC
--------------	--------------------



FRONT/REAR

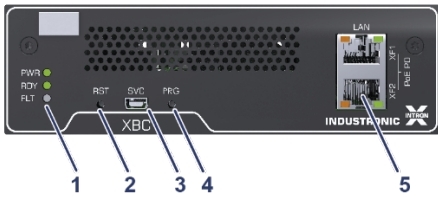

- 1 LEDs for operating status
- 2 Reset button
- 3 Service interface (Mini USB)
- 4 Service button
- 5 Ethernet interfaces

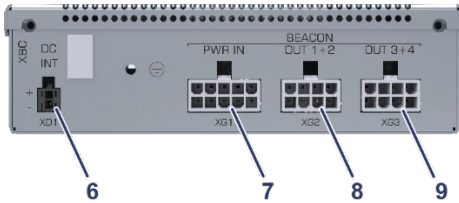

- 6 DC power supply
- 7 Power supply of flashing warning beacon circuits
- 8 Flashing warning beacon circuits 1 and 2
- 9 Flashing warning beacon circuits 3 and 4

FLASHING WARNING BEACON CIRCUITS (XG1, XG2, XG3)

Quantity	4
AC supply per circuit	115/230 V AC +/-20 % Max. 4.2 A AC
DC supply per circuit	Max. 72 V DC Max. 5 A at 24 V DC, Max. 5 A at 48 V DC, Max. 3 A from 60 V DC to 72 V DC
Line monitoring (optional)	Cable break, short circuit and ground leakage

NETWORK INTERFACES (XF1 AND XF2)

Quantity	2 x RJ45
Type	10Base-T/100Base-TX Ethernet, IEEE 802.3
PoE	IEEE 802.3af, Class 3, 12.95 W
Requirements	IPv4 network Support of UDP and SCTP protocols 200 kBit/s bandwidth

SERVICE INTERFACE (SVC)

Quantity	1 x Mini-USB
----------	--------------

ENVIRONMENTAL REQUIREMENTS AND STANDARDS

Ambient temperature during operation	-15 °C to +55 °C (+5 °F to +131 °F)
Storage temperature	-25 °C to +70 °C (-13 °F to +158 °F)
Relative humidity (non-condensing)	Max. 95 %
Degree of protection	IP20
Vibration resistance	2 Hz to 13.2 Hz, +/-1.5 mm, 13.2 Hz to 200 Hz, 1 g
Operating altitude	Max. 2,000 m (6,562 ft) above sea level
Pollution degree	2 (according to EN 62368-1)
Electrical safety	EN 62368-1
EMC	EN 61000-6-2, EN 61000-6-4, EN 55032 Class B, EN 55035, EN 50130-4

ACCESSORIES



10 XCBL 431 4.0 m

Power supply cable for 4 flashing warning beacons, 10 poles, 4 m (13.12 ft), 0.5 mm², 1 x connector covered with heat-shrink tube, 1 x flying leads, halogen-free, flame-retardant

Type number 244-906-401

Further cable lengths available upon request.



8 XCBL 431 4.0 m

Cable for 2 flashing warning beacons, 8 poles, 4 m (13.12 ft), 0.5 mm², 1 x connector covered with heat-shrink tube, 1 x flying leads, halogen-free, flame-retardant

Type number 244-903-401

Further cable lengths available upon request.



2 XCBL 421 1.5 m

Power supply cable for the plug-in device 4 XBC 001, 2 poles, 1.5 m (4.92 ft), 0.5 mm², connectors overmolded on both sides, halogen-free, flame-retardant

Type number 244-902-151

Further cable lengths available upon request.

PREFERRED MODULES

PMOD 4 XBC 001/1

Plug-in device incl. cables for switching and monitoring of up to 4 flashing warning beacon circuits.

Note: A terminal block for connecting the field cables is not included in this module.



OVERVIEW PREFERRED MODULES

PMD 4 XBC 001/1	
Plug-in device 4 XBC 001	x
Cable 10 XCBL 431	x
Cable 8 XCBL 431	2x
Cable 2 XCBL 421	x
Type number	326-030-001

ACTIVATIONS

Please note: To commission the module, an INDUSTRONIC activation is required!

	ACT-X Interface Device	ACT-XBC Line Monitoring
Description	Activation of one INTRON-X interface plug-in device	Activation of line monitoring for line break, short circuit and ground leakage
Type number	101-100-030	101-200-401

© INDUSTRONIC