

1 DXH 01

Ex Handset with Cradle



Features and Functions

- Lightweight, handy and easy to operate
- Reliable fixture
- Degree of protection IP66
- Duplex or half-duplex operation
- Automatic hook-off detection

The 1 DXH 01 handset is designed to be connected to the DX 0x4 / HS and DXE 0x5 digital explosion-proof intercom stations. The handset is lightweight and has excellent sound quality.


Approval:

TÜV 11 ATEX 079072

Type of protection

Ex ib IIC T4

Equipment category:

 II 2G

Explanation:

- Ex** According to EN 60079
- Ib** Intrinsically safe category b
- IIC** Most ignitable gas group
- T4** Surface temperature <135 °C (<275 °F)

Components

- Handset fixture with lock
- Stainless steel armored handset cord
- Connection Cable

Mechanical Data

- Width x height x depth 154 mm x 221 mm x 105 mm (6.1" x 8.7" x 4.1")
- Weight ca. 1.5 kg (approx. 3.3 lbs)
- Color Black

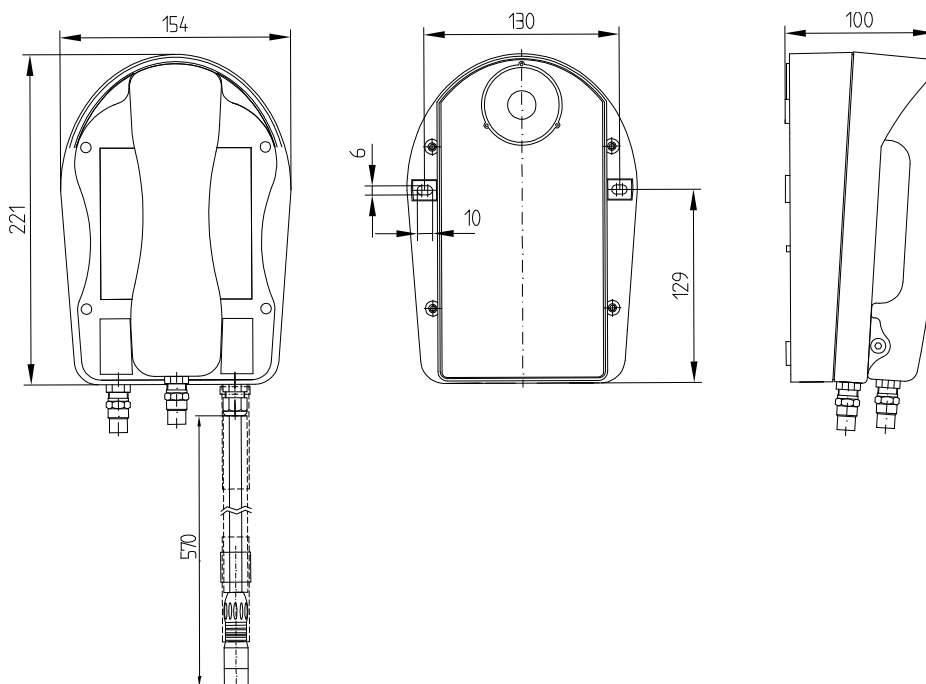


Fig. 1: Dimensional drawing 1 DXH 01

Electrical Data

• Max. input voltage	9 V
• Max. input current	1.2 A
• Max. input power	1 W
• Microphone type	Electret
• Receiver inset	Dynamic
• Input level	0 dB / 200 Ohm

Environmental Requirements and Standards

• Ambient temperature during operation	-20 °C to +55 °C (-4 °F to +131 °F)
• Humidity	Max. 95 %
• Degree of protection	IP66
• EMC	IEC/EN 61000-6-2, IEC/EN 61000-6-4
• Max. ambient noise level	100 dB

Order Data

Type Number

301-432-500

INDUSTRONIC®

Industrie-Electronic GmbH & Co. KG
Carl-Jacob-Kolb-Weg 1
97877 Wertheim / Germany

Tel.: +49 9342 871-0
Fax: +49 9342 871-565

info@industronics.de
www.Industronics.com

Subject to technical modifications