

# 60 WBL 11

## Flashing Warning Beacon



### Features and Functions

- Universal application possibilities
- Suited for industrial environments
- Degree of protection IP65
- Sturdy ABS housing
- Impact-proof lens

The 60 WBL 11 flashing warning beacon is used to visually signal alarm signals as well as incoming calls at intercom stations.

### Call Signaling at Intercom Stations

The beacon will start to flash, as soon as the intercom station receives a call. The signaling will stop, as soon as the incoming call has been accepted or pre-programmed time has elapsed.

### Alarm Signaling

The flashing warning beacon will be activated for the duration of the alarm. It can either be connected to an intercom station or the central exchange unit in order to control the beacon from there.

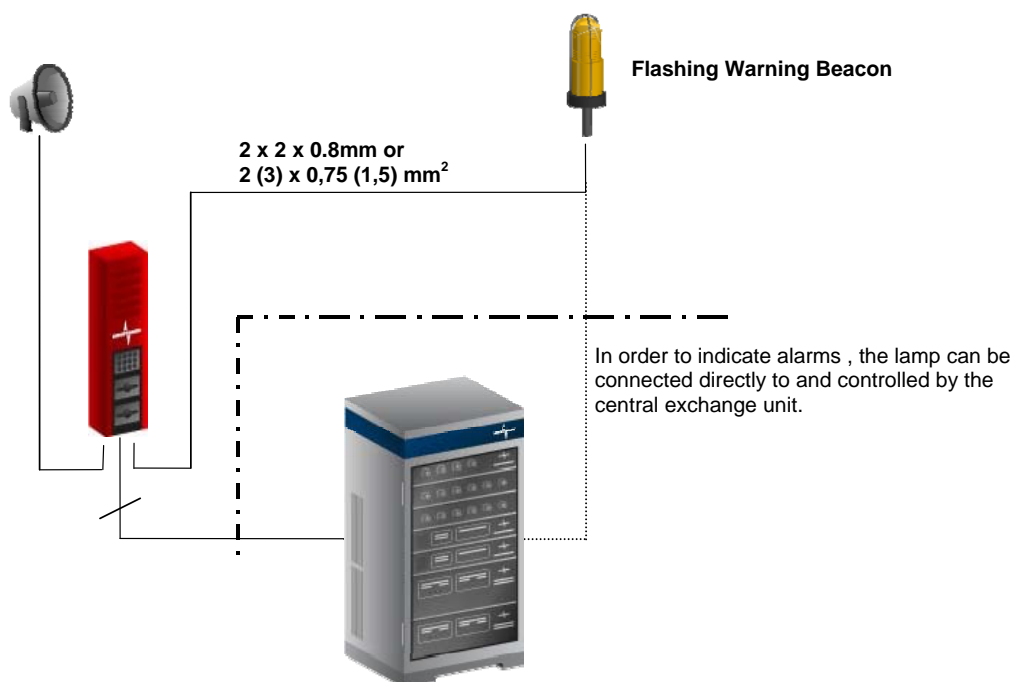


Figure 1: Application

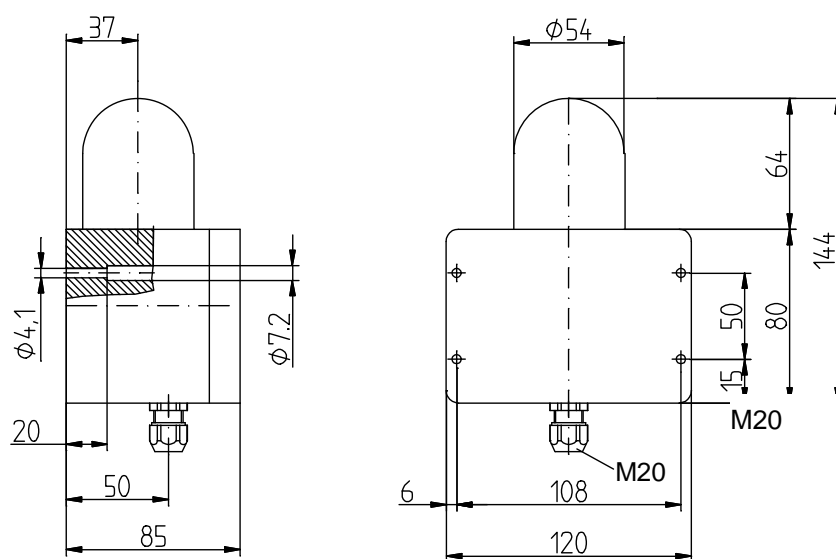


Figure 2: Dimensional drawing 60 WBL 11

#### Mechanical Data

• Housing material	ABS
• Hood material	Polycarbonate (PC)
• Height x width x depth	144 mm x 120 mm x 85 mm (5.7" x 4.7" x 3.4")
• Cable gland	M20
• Weight	Approx. 0.3 kg (approx. 0.7 lbs)
• Colors	Red, orange, yellow, white (other colors on request)

#### Electrical Data

• Operating voltage range	50 VDC to 72 VDC
• Current consumption	125 mA
• Flash energy	5 J
• Flash rate	1 Hz

#### Environmental Requirements and Standards

• Ambient temperature during operation	-30 °C to +55 °C (-22 °F to +131 °F)
• Degree of protection	IP65

Type Overview	Lens Color	Type	Type Number
	White	60 WBL 11/WH	070-000-021/WH
	Orange	60 WBL 11/OG	070-000-021/OG
	Red	60 WBL 11/RD	070-000-021/RD
	Yellow	60 WBL 11/YE	070-000-021/YE

**INDUSTRONIC®**

Industrie-Electronic GmbH & Co. KG  
 Carl-Jacob-Kolb-Weg 1  
 97877 Wertheim / Germany

Tel.: +49 9342 871-0  
 Fax: +49 9342 871-565

info@industronic.de  
 www.industronic.com