

2 SSH 15

Acoustic Hood for Explosive (Hazardous) Areas



Features and Functions

- Acoustic hood of powder-coated sheet steel for use in Ex zone 1, 2, and 22
- Flame-retardant insulation
- Up to 30 dB noise reduction
- Suitable for use with INDUSTRONIC intercom stations of the DA/DX 0x3, DA/DX 0x4, and DA(E)/DX(E) 0x5 series

The acoustic hoods of the 2 SSH 15 series from INDUSTRONIC are used for noise reduction in extremely noisy environments. They ensure a high level of noise insulation and thus allow a clear and understandable communication. The outer material consists of powder-coated sheet steel. The inner lining is made of special foam rubber according to ISO 3582-SE, UL94-HF1. They are suitable for the use in Ex zones 1, 2, and 22.


Technical Data

• Outer material	Powder-coated sheet steel
• Inner lining	Stainless steel perforated plate and special foam rubber
• Insulation	Flame-retardant according to ISO 3582-SE, UL94-HF1
• Noise reduction	Max. 30 dB
• Height x width x depth	900 mm x 650 mm x 535 mm (34.4" x 25.6" x 21")
• Weight	34 kg (75 lbs)
• Ambient temperature	-40 °C to +85 °C (-40 °F to +185 °F)
• Colors	Orange, red, yellow, green, black Other colors are available upon request.

Scope of Supply

- 1 x acoustic hood
- 1 x mounting material

Order Data	Color	Type Number
	Orange	070-200-100/OG
	Red	070-200-100/RD
	Yellow	070-200-100/YE
	Green	070-200-100/GN
	Black	070-200-100/BK

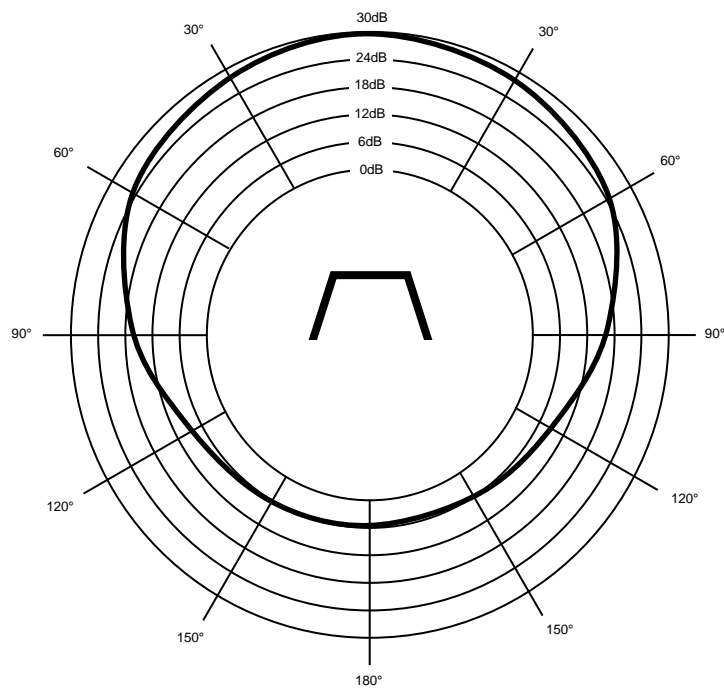

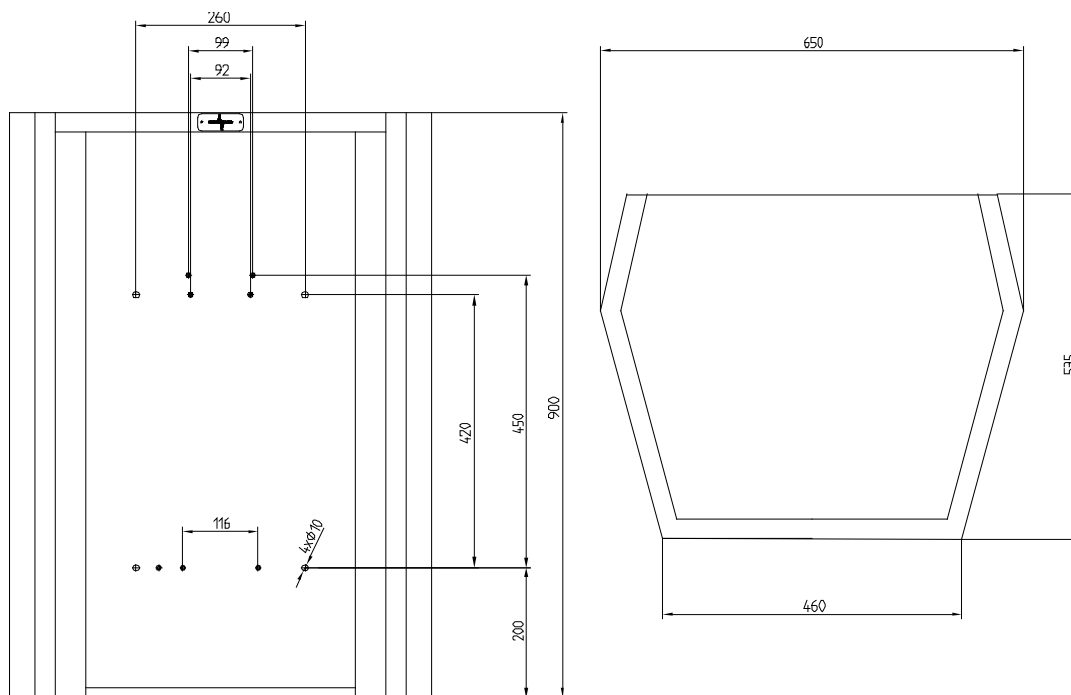


Fig. 2: Dimensional drawing 2 SSH 15

INDUSTRONIC®

Industrie-Electronic GmbH & Co. KG
 Carl-Jacob-Kolb-Weg 1
 97877 Wertheim / Germany

Tel.: +49 9342 871-0
 Fax: +49 9342 871-565

info@industronic.de
 www.industronic.com